



APPLICATIONS

Wireless Network
Telecom/Datacom
Industry Control System
Measurement Equipment
Semiconductor Equipment

FEATURES

- 15 WATTS OUTPUT POWER
- OUTPUT CURRENT UP TO 4.5A
- STANDARD 2.0 X 1.0 X 0.4 INCH PACKAGE
- HIGH EFFICIENCY UP TO 88%
- 4:1 ULTRA WIDE INPUT VOLTAGE RANGE
- SIX-SIDED CONTINUOUS SHIELD
- FIXED SWITCHING FREQUENCY
- CE MARK MEETS 2006/95/EC, 93/68/EEC AND 2004/108/EC
- UL60950-1, EN60950-1 AND IEC60950-1 LICENSED
- ISO9001 CERTIFIED MANUFACTURING FACILITIES
- COMPLIANT TO RoHS EU DIRECTIVE 2002/95/EC

OPTIONS

Positive logic & Negative logic Remote On/Off

DESCRIPTION

The FEC15W series offer 15 watts of output power from a 2 x 1 x 0.4 inch package. The FEC15W series with 4:1 ultra wide input voltage of 9-36 and 18-75 VDC.

TECHNICAL SPECIFICATION

All specifications are typical at nominal input, full load and 25°C otherwise noted

OUTPUT SPECIFICATIONS			
Output power		15 Watts, max.	
Voltage accuracy	Full load and nominal Vin	± 1%	
Minimum load		0%	
Line regulation	LL to hI at Full load	Single ± 0.2% Dual ± 0.5%	
Load regulation	No load to Full load	Single ± 0.5% Dual ± 1%	
Cross regulation (Dual)	Asymmetrical load 25% / 100% FL	± 5%	
Ripple and noise	20MHz bandwidth (Measured with a 0.1µF/50V MLCC)	See table	
Temperature coefficient		±0.02% / °C, max.	
Transient response recovery time	25% load step change	250µS	
Over voltage protection	3.3V output	3.9V	
Zener diode clamp	5V output	6.2V	
	12V output	15V	
	15V output	18V	
Over load protection	% of FL at nominal input	150%, typ.	
Short circuit protection		Hiccup, automatics recovery	
GENERAL SPECIFICATIONS			
Efficiency		See table	
Isolation voltage	Input to Output	1600VDC, min.	
	Input(Output) to case	1600VDC, min.	
Case grounding		Connect case to -Vin with decoupling Y Cap	
Isolation resistance		10 ⁹ ohms, min.	
Isolation capacitance		1500pF, max.	
Switching frequency		400KHz, typ.	
Approvals and standard		IEC60950-1, UL60950-1, EN60950-1	
Case material		Nickel-coated copper	
Base material		FR4 PCB	
Potting material		Epoxy (UL94-V0)	
Dimensions		2.00 X 1.00 X 0.40 Inch (50.8 X 25.4 X 10.2 mm)	
Weight		27g (0.95oz)	
MTBF (Note 1)	BELLCORE TR-NWT-000332	1.819 x 10 ⁶ hrs	
	MIL-HDBK-217F	9.205 x 10 ⁵ hrs	





INPUT SPECIFICATIONS			
Input voltage range	24V nominal input	9 – 36VDC	
	48V nominal input	18 – 75VDC	
Input filter		Pi type	
Input surge voltage	24V input	50VDC	
100mS max.	48V input	100VDC	
Input reflected ripple current	Nominal Vin and full load	20mA _{p-p}	
Start up time	Nominal Vin and constant resistive load	Power up	20mS, typ.
Start-up voltage	24V input	9VDC	
	48V input	18VDC	
Shutdown voltage	24V input	7.5VDC	
	48V input	15VDC	
Remote ON/OFF (Option) (Note 6)			
(Positive logic)	DC-DC ON	Open or 3 V < Vr < 12V	
	DC-DC OFF	Short or 0V < Vr < 1.2V	
(Negative logic)	DC-DC ON	Short or 0V < Vr < 1.2V	
	DC-DC OFF	Open or 3 V < Vr < 12V	
Input current of Remote control pin	Nominal Vin	-0.5mA ~ + 0.5mA	
Remote off state input current	Nominal Vin	2.5mA	
ENVIRONMENTAL SPECIFICATIONS			
Operating ambient temperature		-40°C ~ +76°C (without derating) +76°C ~ +105°C (with derating)	
Maximum case temperature		105°C	
Storage temperature range		-55°C ~ +125°C	
Thermal impedance (Note 7)	Nature convection	12°C/Watt	
	Nature convection with heat-sink	10°C/Watt	
Thermal shock		MIL-STD-810F	
Vibration		MIL-STD-810F	
Relative humidity		5% to 95% RH	
EMC CHARACTERISTICS			
EMI (Note 8)	EN55022		Class A
ESD	EN61000-4-2	Air Contact ± 8KV ± 6KV	Perf. Criteria B
Radiated immunity	EN61000-4-3	10 V/m	Perf. Criteria A
Fast transient (Note 9)	EN61000-4-4	± 2KV	Perf. Criteria B
Surge (Note 9)	EN61000-4-5	± 1KV	Perf. Criteria A
Conducted immunity	EN61000-4-6	10 Vr.m.s	Perf. Criteria A




Model Number	Input Range	Output Voltage	Output Current		Output ⁽⁴⁾ Ripple & Noise	Input Current		Eff ⁽⁴⁾ (%)	Capacitor ⁽⁵⁾ Load max.
			Min. load	Full load		No Load ⁽³⁾	Full Load ⁽²⁾		
FEC15-24S3P3W	9 – 36 VDC	3.3 VDC	0mA	4500mA	50mVp-p	50mA	755mA	86	14700μF
FEC15-24S05W	9 – 36 VDC	5 VDC	0mA	3000mA	50mVp-p	65mA	753mA	87	7200μF
FEC15-24S5P1W	9 – 36 VDC	5.1 VDC	0mA	3000mA	50mVp-p	65mA	768mA	87	7200μF
FEC15-24S12W	9 – 36 VDC	12 VDC	0mA	1250mA	75mVp-p	22mA	753mA	87	1250μF
FEC15-24S15W	9 – 36 VDC	15 VDC	0mA	1000mA	75mVp-p	22mA	753mA	87	800μF
FEC15-24D05W	9 – 36 VDC	± 5 VDC	0mA	± 1500mA	75mVp-p	55mA	753mA	87	± 3600μF
FEC15-24D12W	9 – 36 VDC	± 12 VDC	0mA	± 625mA	75mVp-p	30mA	744mA	88	± 625μF
FEC15-24D15W	9 – 36 VDC	± 15 VDC	0mA	± 500mA	75mVp-p	30mA	744mA	88	± 400μF
FEC15-48S3P3W	18 – 75 VDC	3.3 VDC	0mA	4500mA	50mVp-p	35mA	377mA	86	14700μF
FEC15-48S05W	18 – 75 VDC	5 VDC	0mA	3000mA	50mVp-p	35mA	372mA	88	7200μF
FEC15-48S5P1W	18 – 75 VDC	5.1 VDC	0mA	3000mA	50mVp-p	35mA	379mA	88	7200μF
FEC15-48S12W	18 – 75 VDC	12 VDC	0mA	1250mA	75mVp-p	15mA	377mA	87	1250μF
FEC15-48S15W	18 – 75 VDC	15 VDC	0mA	1000mA	75mVp-p	15mA	377mA	87	800μF
FEC15-48D05W	18 – 75 VDC	± 5 VDC	0mA	± 1500mA	75mVp-p	35mA	372mA	88	± 3600μF
FEC15-48D12W	18 – 75 VDC	± 12 VDC	0mA	± 625mA	75mVp-p	17mA	372mA	88	± 625μF
FEC15-48D15W	18 – 75 VDC	± 15 VDC	0mA	± 500mA	75mVp-p	17mA	372mA	88	± 400μF


Note:

1. BELLCORE TR-NWT-000332. Case 1: 50% Stress, Temperature at 40°C.
MIL-HDBK-217F Notice2 @Ta=25 °C, Full load(Ground, Benign, controlled environment)
2. Maximum value at nominal input voltage and full load.
3. Typical value at nominal input voltage and no load.
4. Typical value at nominal input voltage and full load.
5. Test by minimum Vin and constant resistive load.
6. The ON/OFF control pin voltage is referenced to -Vin.
To order positive logic ON/OFF control add the suffix-P (Ex: FEC15-48S05W-P)
To order negative logic ON/OFF control add the suffix-N (Ex: FEC15-48S05W-N)
7. Heat sink is optional and P/N: 7G-0020C-F.
8. The FEC15W series can meet EN55022 Class A with parallel an external capacitor to the input pins.
Recommend : 24Vin : NA.
48Vin : 1μF/100V 1210 MLCC.
9. An external input filter capacitor is required if the module has to meet EN61000-4-4, EN61000-4-5.
The filter capacitor Power Mate suggest: Nippon chemi-con KY series, 220 μF/100V, ESR 48mΩ.

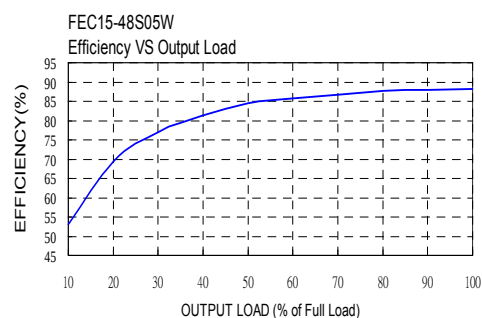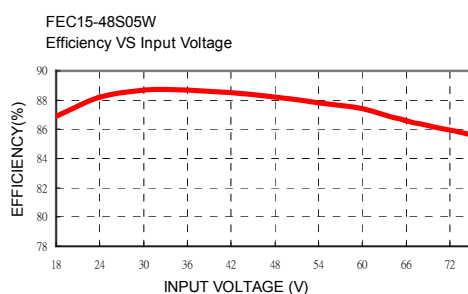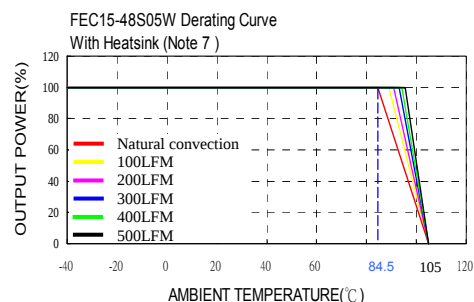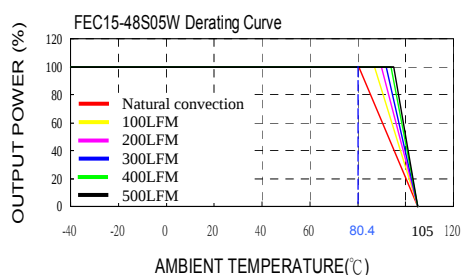

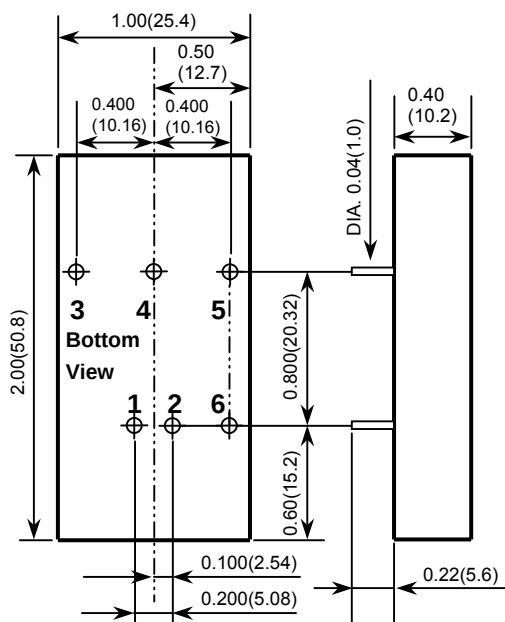

1. All dimensions in Inches (mm)
Tolerance: X.XX±0.02 (X.X±0.5)
X.XXX±0.01 (X.XX±0.25)
2. Pin pitch tolerance ±0.01(0.25)
3. Pin dimension tolerance ±0.004 (0.1)

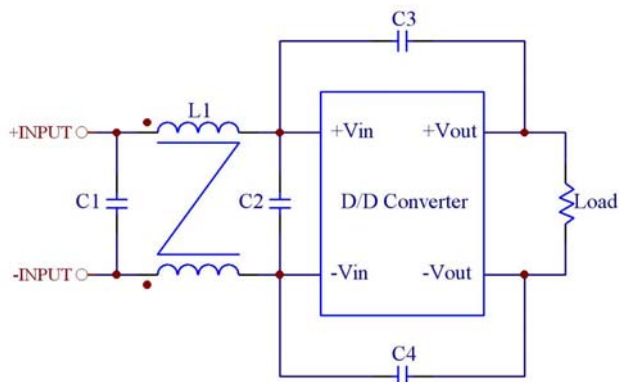


Recommended Filter for EN55022 Class B Compliance

The components used in the above figure, together with the manufacturers' part numbers for these components, are as follows:

	C1	C2	C3	C4	L1
FEC15-24XXXW	2.2μF/50V 1812 MLCC	NA	1000pF/2KV MLCC	1000pF/2KV MLCC	450μH Common Choke PMT-048
FEC15-48XXXW	2.2μF/100V 1812 MLCC	2.2μF/100V 1812 MLCC	1000pF/2KV MLCC	1000pF/2KV MLCC	325μH Common Choke PMT-050

PIN CONNECTION		
PIN	SINGLE	DUAL
1	+ INPUT	+ INPUT
2	- INPUT	- INPUT
3	+ OUTPUT	+ OUTPUT
4	NO PIN	COMMON
5	- OUTPUT	- OUTPUT
6	CTRL (Option)	CTRL (Option)

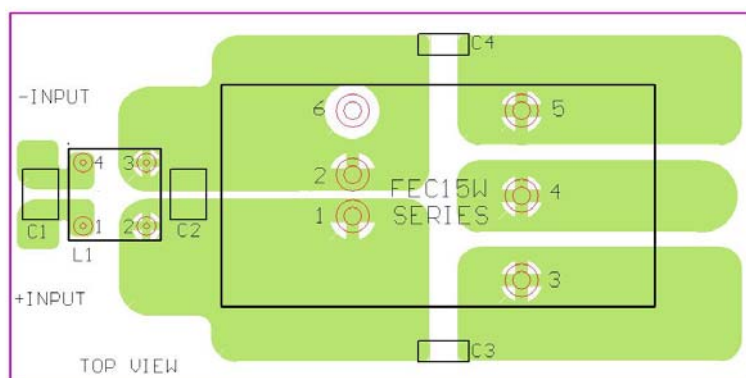

Recommended EN55022 Class B Filter Circuit Layout