



External view

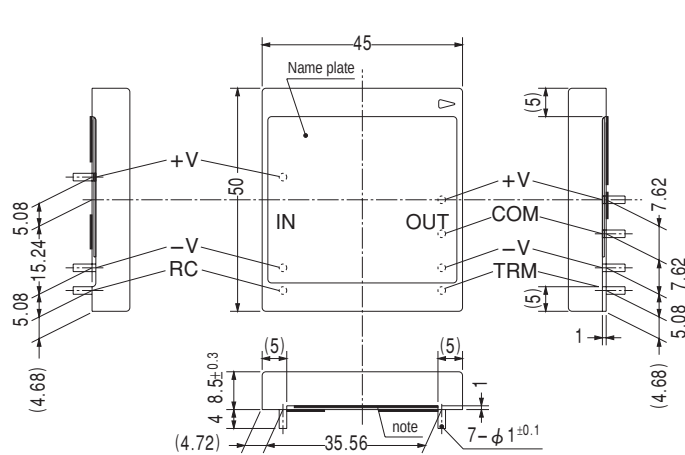


note) Internal parts
 ※Weight: 55g or less.
 ※Tolerance: ± 0.5
 ※Case material: Aluminum

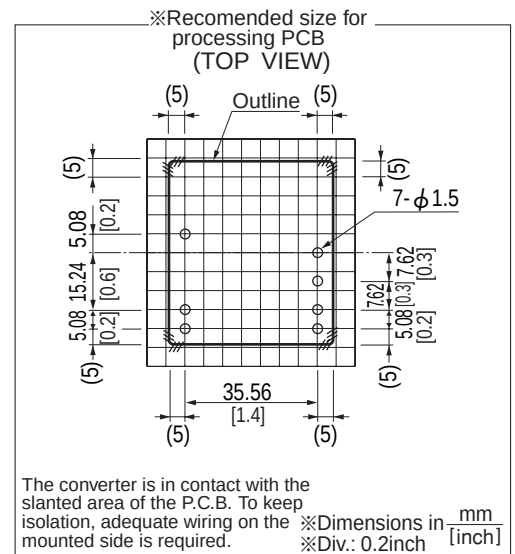


The converter is in contact with the slanted area of the P.C.B. To keep isolation, adequate wiring on the mounted side is required.
 ※Dimensions in mm [inch]
 ※Div.: 0.2inch

Performance data


■ STATIC CHARACTERISTICS (ZUW151212)

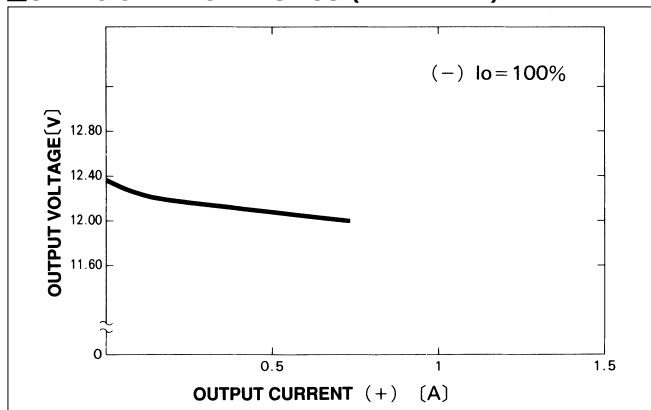

■ RISE TIME & FALL TIME (ZUW151212:+12V)

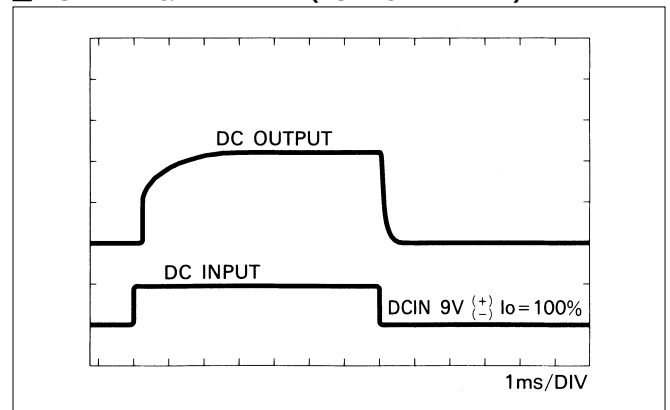

■ OVERCURRENT CHARACTERISTICS (ZUW151212)

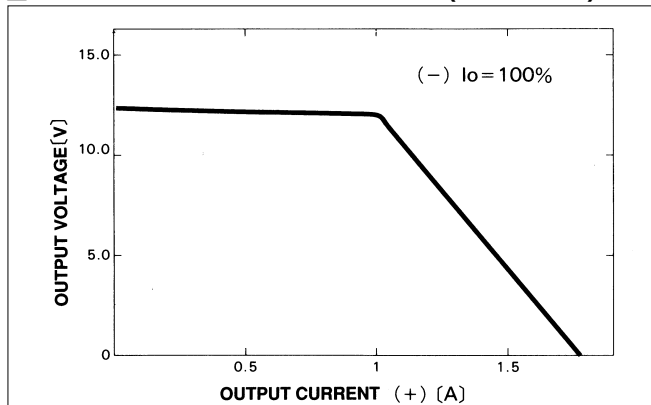

■ DERATING CURVE

